


| NOMINAL BRAID WIDTH | NOMINAL BRAID THICKNESS | NOMINAL CIRC MILS | CAPACITY AMPS | APPROX AWG EQUIV |
|---------------------|-------------------------|-------------------|---------------|------------------|
| .250 | .030 | 4,200 | 32 | 14 |

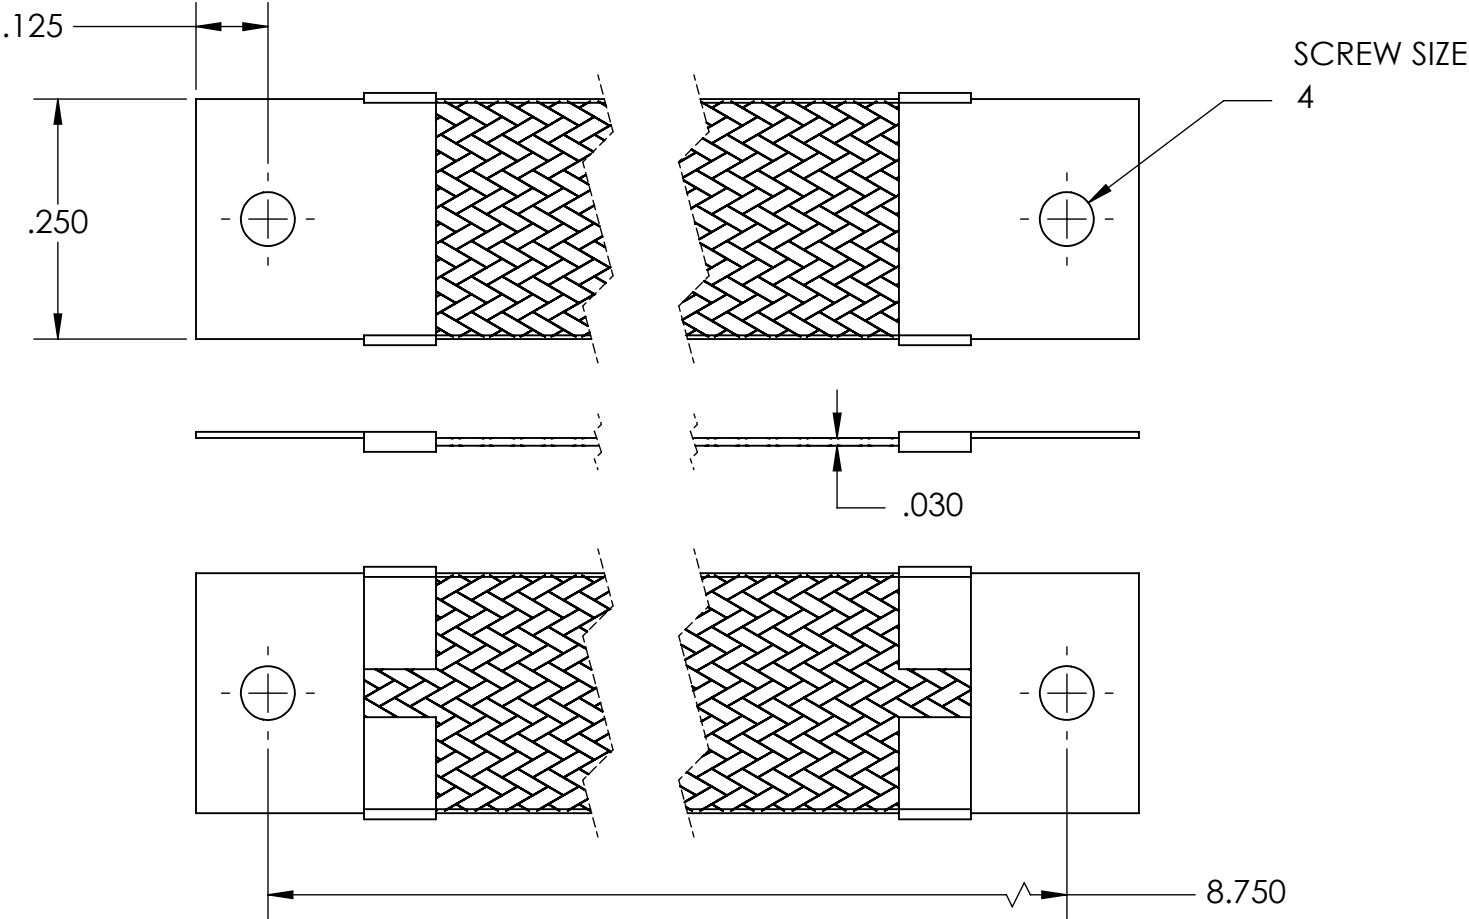

MATERIALS
 GROUND ENDS: COPPER (TIN SOLDER DIP)
 BRAID: TINNED COPPER
 INSULATION: HEAT SHRINKABLE TUBING

ASSEMBLY
 TERMINALS (GROUND ENDS) ARE
 CRIMPED AND SOFT TIN SOLDERED TO
 BRAID.

PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS
 DRAWING IS THE SOLE PROPERTY OF
 SEASTROM MANUFACTURING. ANY
 REPRODUCTION IN PART OR AS A WHOLE
 WITHOUT THE WRITTEN PERMISSION OF
 SEASTROM MANUFACTURING IS
 PROHIBITED.

| | | | | | | | | | |
|--|-----------|------|------|--------------|--|------------------|--|-----------------------------------|--|
| DIMENSIONS ARE IN INCHES ALL DIMENSIONS ARE FOR REFERENCE ONLY | | NAME | DATE | SEASTROM MFG | | | | | |
| | DRAWN | | | | | | | | |
| | CHECKED | | | GROUND STRAP | | | | | |
| | ENG APPR. | | | | | | | | |
| | MFG APPR. | | | | | | | | |
| Q.A. | | | | | | | | | |
| MATERIAL SEE NOTES | COMMENTS: | | | | | SIZE A | | DWG. NO. 5025-102-8.750 | |
| FINISH SEE NOTES | | | | | | | | | |
| DRAWING IS NOT TO SCALE | | | | | | | | | |
| | | | | SHEET 1 OF 1 | | | | | |