


NOMINAL BRAID WIDTH	NOMINAL BRAID THICKNESS	NOMINAL CIRC MILS	CAPACITY AMPS	APPROX AWG EQUIV
.375	.030	7,200	40	12

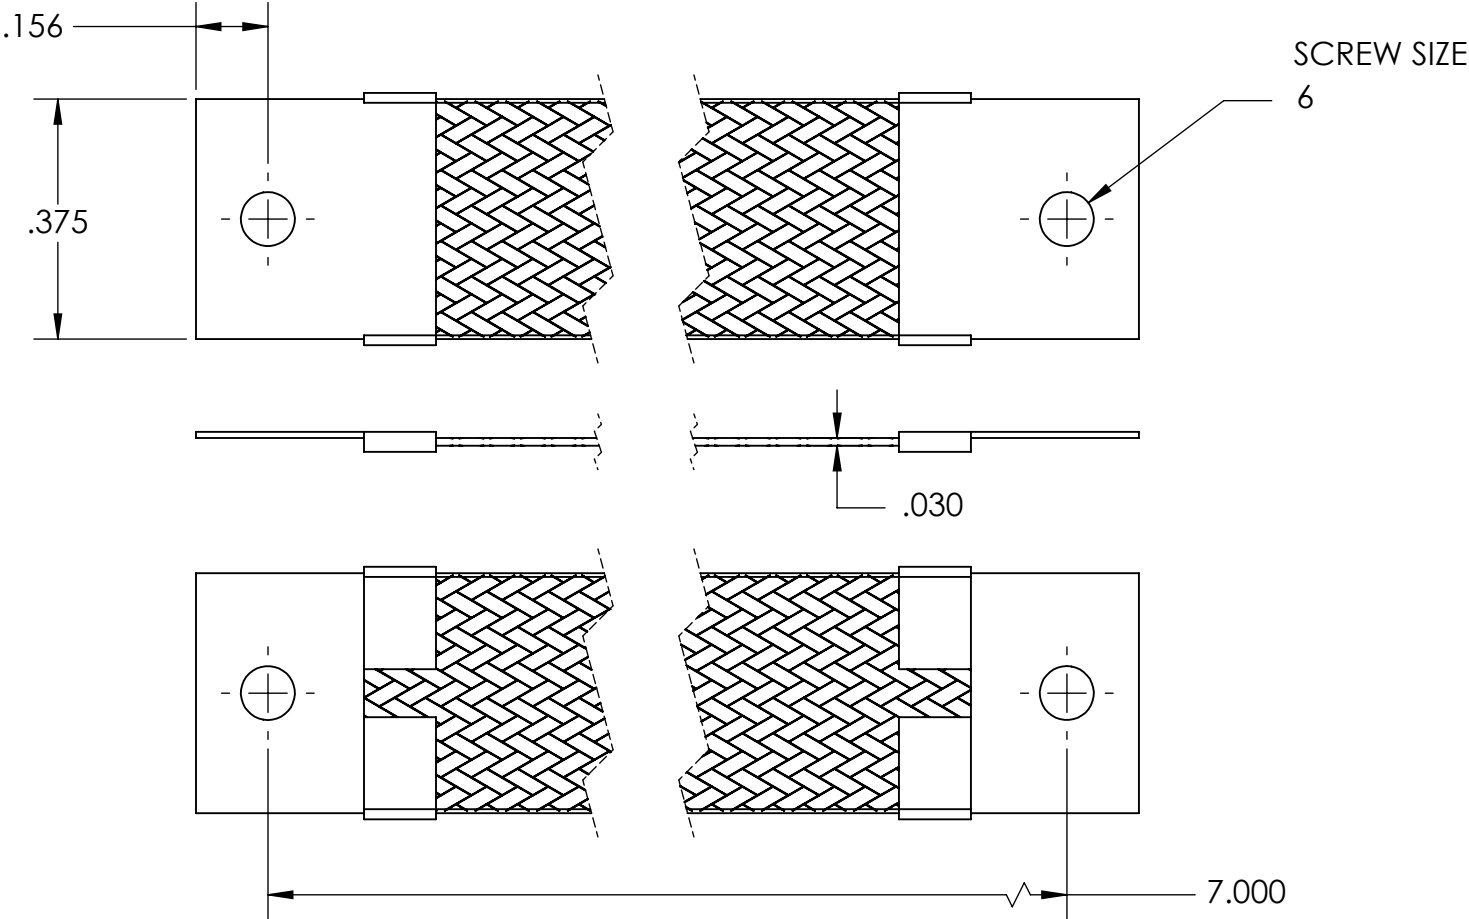

MATERIALS  
 GROUND ENDS: COPPER (TIN SOLDER DIP)  
 BRAID: TINNED COPPER  
 INSULATION: NONE

ASSEMBLY  
 TERMINALS (GROUND ENDS) ARE  
 CRIMPED AND SOFT TIN SOLDERED TO  
 BRAID.

**PROPRIETARY AND CONFIDENTIAL**  
 THE INFORMATION CONTAINED IN THIS  
 DRAWING IS THE SOLE PROPERTY OF  
 SEASTROM MANUFACTURING. ANY  
 REPRODUCTION IN PART OR AS A WHOLE  
 WITHOUT THE WRITTEN PERMISSION OF  
 SEASTROM MANUFACTURING IS  
 PROHIBITED.

DIMENSIONS ARE IN INCHES ALL DIMENSIONS ARE FOR REFERENCE ONLY		NAME	DATE	SEASTROM MFG	
	DRAWN				
	CHECKED			GROUND STRAP	
	ENG APPR.				
	MFG APPR.				
MATERIAL SEE NOTES	Q.A.			SIZE DWG. NO. REV. <b>A</b> 5025-3-7.000 -	
FINISH SEE NOTES	COMMENTS:				
DRAWING IS NOT TO SCALE				SHEET 1 OF 1	