


| NOMINAL BRAID WIDTH | NOMINAL BRAID THICKNESS | NOMINAL CIRC MILS | CAPACITY AMPS | APPROX AWG EQUIV |
|---------------------|-------------------------|-------------------|---------------|------------------|
| .250                | .030                    | 4,200             | 32            | 14               |

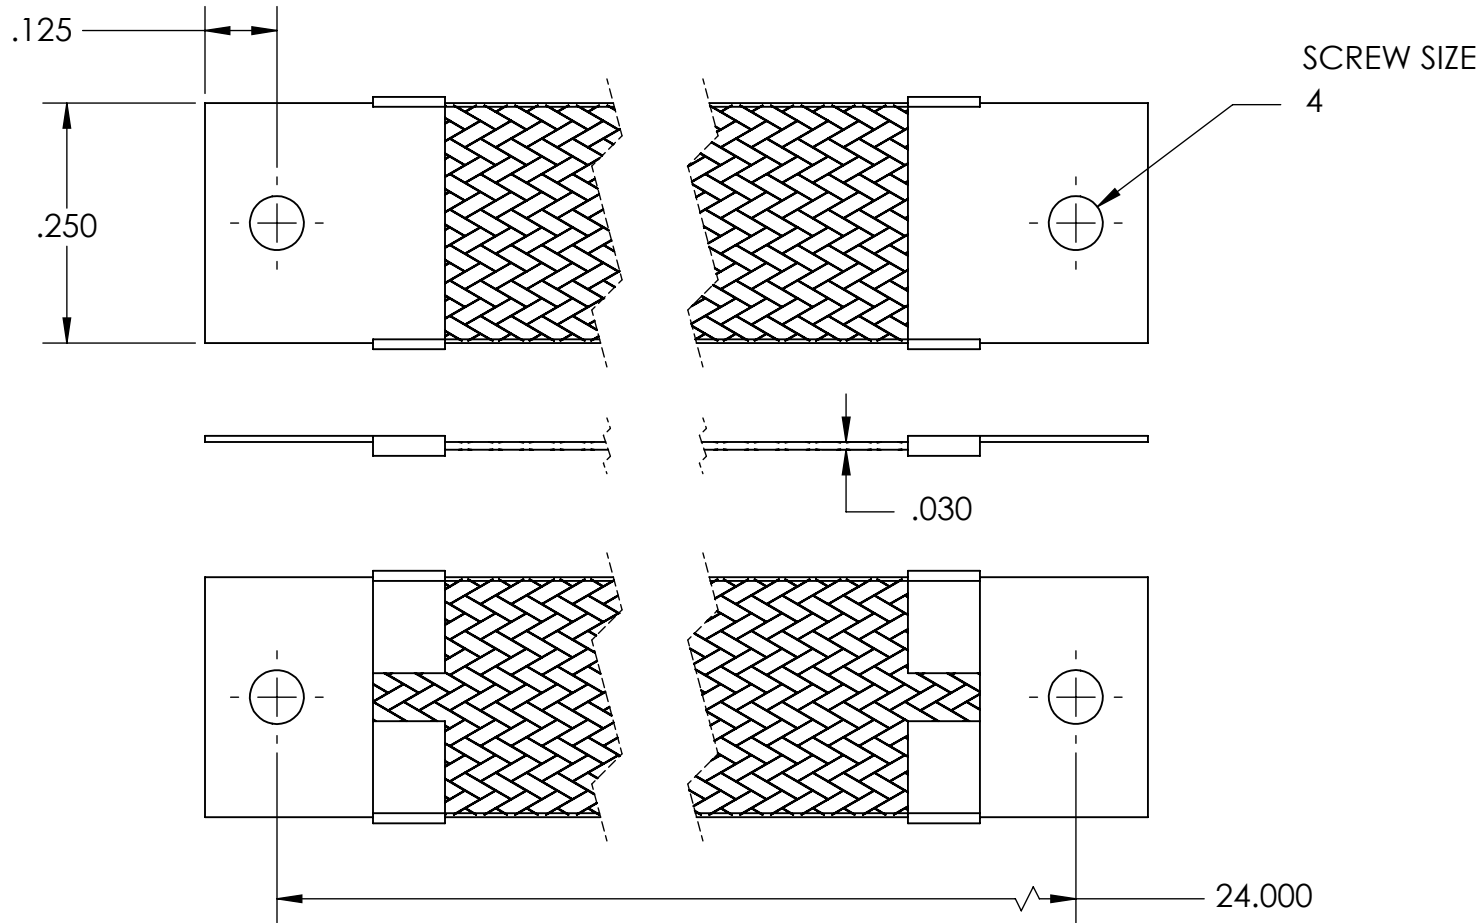

MATERIALS  
GROUND ENDS: COPPER (TIN SOLDER DIP)  
BRAID: TINNED COPPER  
INSULATION: HEAT SHRINKABLE TUBING

ASSEMBLY  
TERMINALS (GROUND ENDS) ARE  
CRIMPED AND SOFT TIN SOLDERED TO  
BRAID.

**PROPRIETARY AND CONFIDENTIAL**  
THE INFORMATION CONTAINED IN THIS  
DRAWING IS THE SOLE PROPERTY OF  
SEASTROM MANUFACTURING. ANY  
REPRODUCTION IN PART OR AS A WHOLE  
WITHOUT THE WRITTEN PERMISSION OF  
SEASTROM MANUFACTURING IS  
PROHIBITED.

|  |           |      |      |              |                             |           |
|--|-----------|------|------|--------------|-----------------------------|-----------|
| DIMENSIONS ARE IN INCHES<br>ALL DIMENSIONS ARE FOR<br>REFERENCE ONLY |           | NAME | DATE | SEASTROM MFG |                             |           |
|  | DRAWN     |      |      |              |                             |           |
|  | CHECKED   |      |      | GROUND STRAP |                             |           |
|  | ENG APPR. |      |      |              |                             |           |
|  | MFG APPR. |      |      |              |                             |           |
| MATERIAL<br>SEE NOTES  | Q.A.      |      |      | COMMENTS:    |                             |           |
| FINISH<br>SEE NOTES  |           |      |      |              |                             |           |
| DRAWING IS NOT TO SCALE  |           |      |      | SIZE<br>A    | DWG. NO.<br>5025-102-24.000 | REV.<br>- |
|  |           |      |      | SHEET 1 OF 1 |                             |           |