


| NOMINAL BRAID WIDTH | NOMINAL BRAID THICKNESS | NOMINAL CIRC MILS | CAPACITY AMPS | APPROX AWG EQUIV |
|---------------------|-------------------------|-------------------|---------------|------------------|
| .375 | .030 | 7,200 | 40 | 12 |

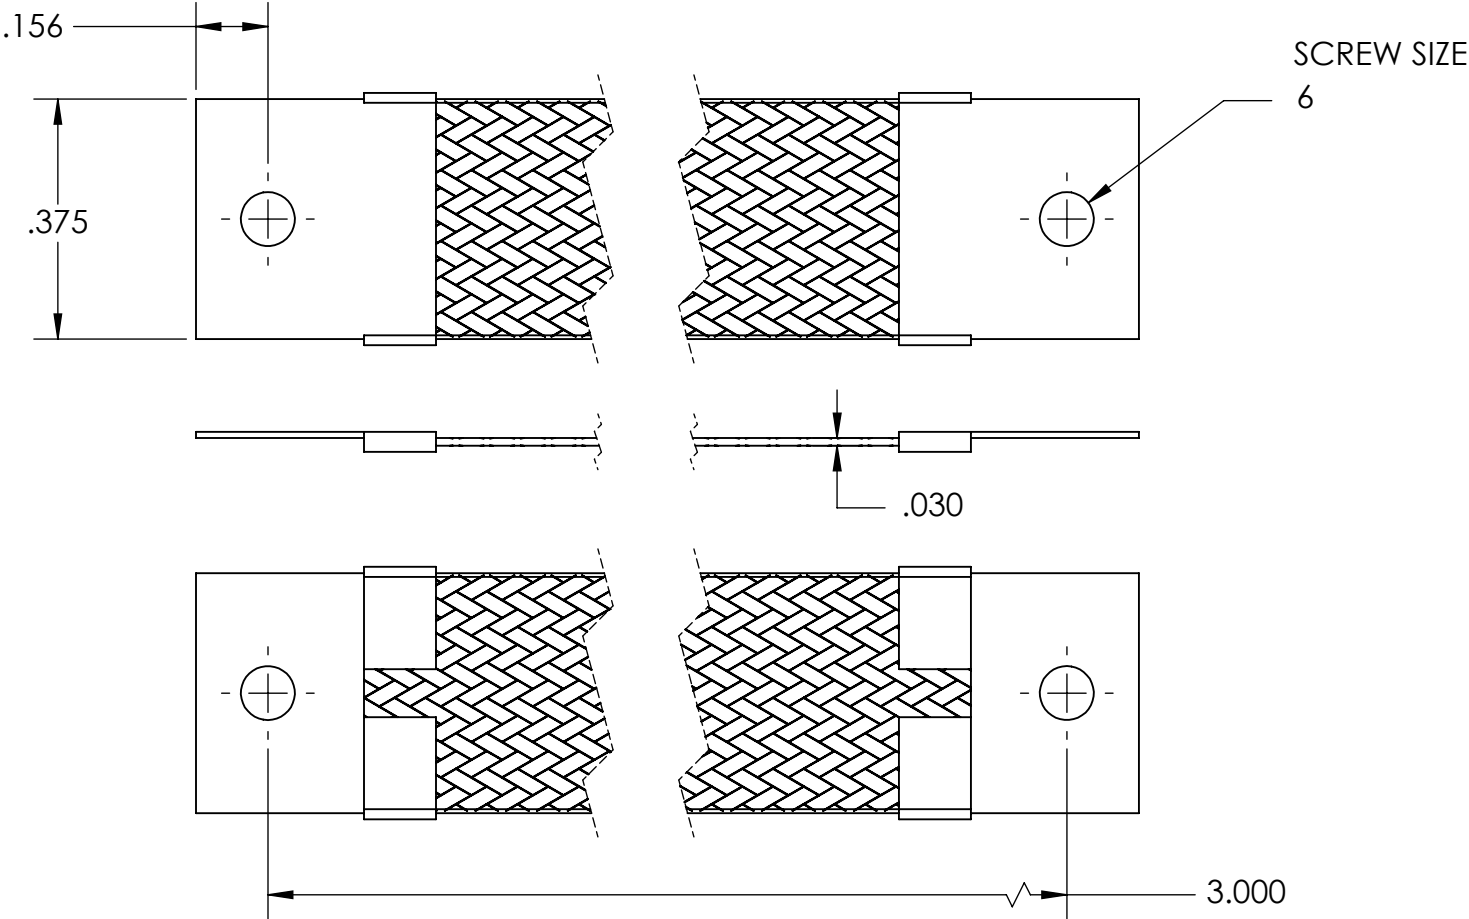

MATERIALS
GROUND ENDS: COPPER (TIN SOLDER DIP)
BRAID: TINNED COPPER
INSULATION: NONE

ASSEMBLY
TERMINALS (GROUND ENDS) ARE
CRIMPED AND SOFT TIN SOLDERED TO
BRAID.

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
SEASTROM MANUFACTURING. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
SEASTROM MANUFACTURING IS
PROHIBITED.

| | | | | | | | | | |
|--|-----------|------|------|--------------|--|------------------|--|---------------------------------|--|
| DIMENSIONS ARE IN INCHES ALL DIMENSIONS ARE FOR REFERENCE ONLY | | NAME | DATE | SEASTROM MFG | | | | | |
| | DRAWN | | | | | | | | |
| | CHECKED | | | GROUND STRAP | | | | | |
| | ENG APPR. | | | | | | | | |
| | MFG APPR. | | | | | | | | |
| Q.A. | | | | | | | | | |
| MATERIAL SEE NOTES | COMMENTS: | | | | | SIZE A | | DWG. NO. 5025-3-3.000 | |
| FINISH SEE NOTES | | | | | | | | | |
| DRAWING IS NOT TO SCALE | | | | SHEET 1 OF 1 | | | | | |