


| D+/-.015 | L+/-.01 | T (Stk)+/-.003 | H (Max) | W (Base Max) | X+/-.02 | E+/-.003 | A+/-.005 | B+/-.005 | N+/-.005 |
|---|---|---|---|---|---|---|---|---|---|
| 0.875 | 0.500 | 0.040 | 1.550 | 0.950 | 0.875 | 0.147 | 0.171 | 0.158 | 0.330 |

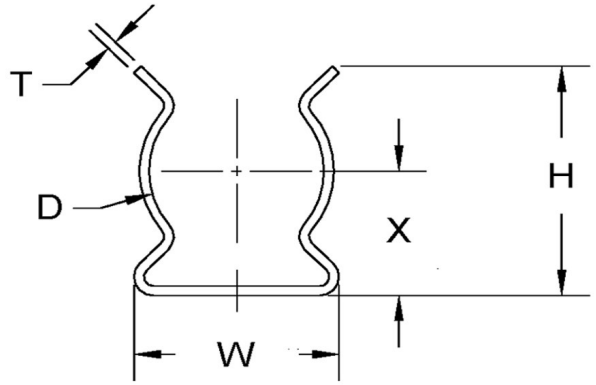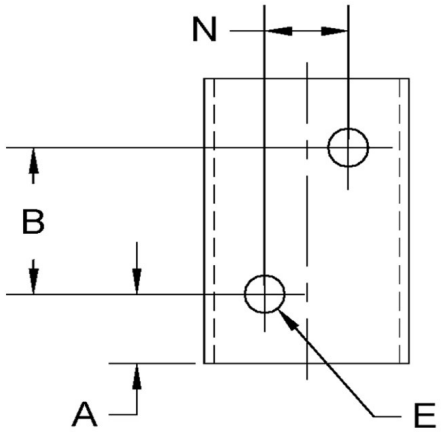


NOTE:

ALL DIMENSIONS ARE TO BE MEASURED WITH THE SPRING CLIP SECURED TO A FLAT SURFACE AND A COMPONENT OF THE NOMINAL DIAMETER IN PLACE.

SEASTROM MANUFACTURING CO., INC.
456 SEASTROM STREET
TWIN FALLS, IDAHO 83301
(208) 737-4300 FAX (208) 734-7222

ALL INFORMATION COPYRIGHTED BY SEASTROM MFG. ©

| | |
|---|---|
| **PART NO.:** | 4515-87-50-1-S |
| **PART NAME:** | Spring Clips 05 |
| **MATERIAL:** | Beryllium Copper |
| **HEAT TREAT:** | Please refer to Material & Finish Specifications in Engineering Resources |
| **FINISH:** | Silver (All Dimensions Are Prior To Plating) |

Dimensions in Inches