


| D+/-.015 | L+/-.01 | T (Stk)+/-.002 | H (Max) | W (Base Max) | X+/-.02 | E+/-.003 | A+/-.005 | B+/-.005 | C+/-.005 | # Of Holes |
|---|---|---|---|---|---|---|---|---|---|---|
| 0.100 | 0.800 | 0.010 | 0.230 | 0.160 | 0.112 | 0.071 | 0.200 | 0.400 | 0 | 2 |

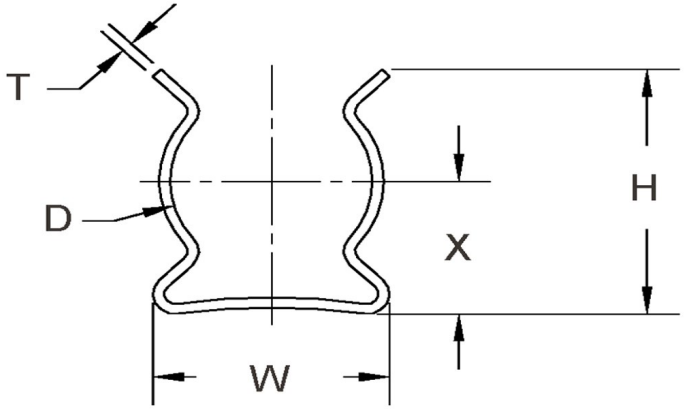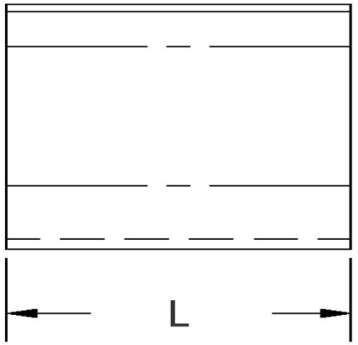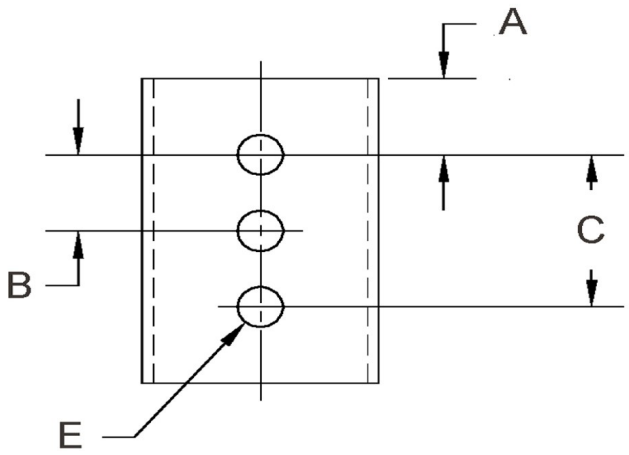


NOTE:

ALL DIMENSIONS ARE TO BE MEASURED WITH THE SPRING CLIP SECURED TO A FLAT SURFACE AND A COMPONENT OF THE NOMINAL DIAMETER IN PLACE.

SEASTROM MANUFACTURING CO., INC.
456 SEASTROM STREET
TWIN FALLS, IDAHO 83301
(208) 737-4300 FAX (208) 734-7222

ALL INFORMATION COPYRIGHTED BY SEASTROM MFG. ©

| | |
|---|---|
| **PART NO.:** | 4521-10-80-1-S |
| **PART NAME:** | Spring Clips 01 |
| **MATERIAL:** | Beryllium Copper |
| **HEAT TREAT:** | Please refer to Material & Finish Specifications in Engineering Resources |
| **FINISH:** | Silver (All Dimensions Are Prior To Plating) |

Dimensions in Inches