


| D+/-0.015 | L+/-0.01 | T (Stk)+/-0.001 | H (Max) | W (Base Max) | X+/-0.02 | E+/-0.003 | A+/-0.005 | B+/-0.005 | C+/-0.005 | M+/-0.03 | N+/-0.03 | S (Ref) |
|-----------|----------|-----------------|---------|--------------|----------|-----------|-----------|-----------|-----------|----------|----------|---------|
| 0.260 | 0.500 | 0.012 | 0.360 | 0.300 | 0.200 | 0.071 | 0.125 | 0.250 | 0 | 0.235 | 0 | 0.032 |



ALL DIMENSIONS ARE TO BE MEASURED WITH THE SPRING CLIP SECURED TO A FLAT SURFACE AND A COMPONENT OF THE NOMINAL DIAMETER IN PLACE.

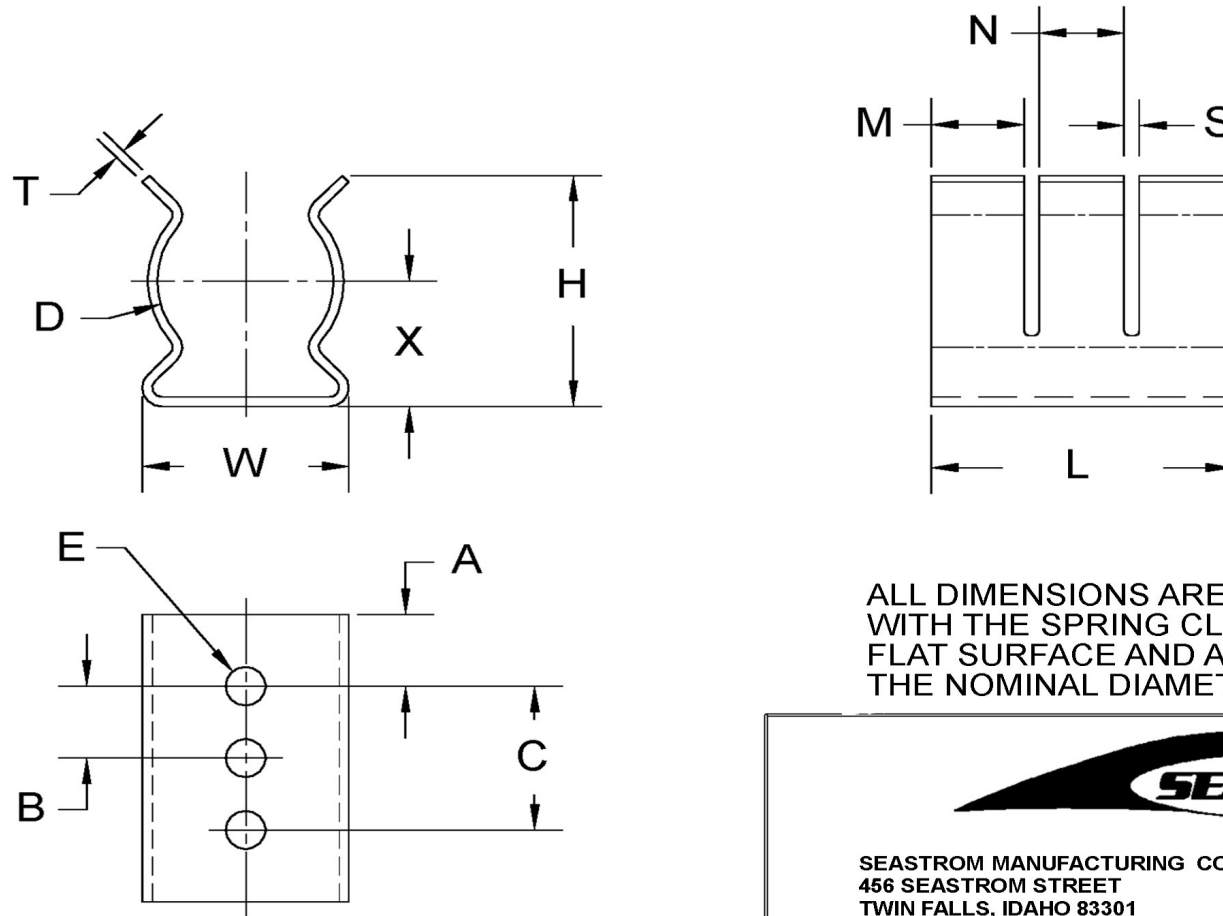

SEASTROM MANUFACTURING CO., INC.
 456 SEASTROM STREET
 TWIN FALLS, IDAHO 83301
 (208) 737-4300 FAX (208) 734-7222

ALL INFORMATION
 COPYRIGHTED BY
 SEASTROM MFG. ©

| | |
|--------------------|---|
| PART NO.: | 4527-26-50-1-N |
| PART NAME: | Spring Clips 02 |
| MATERIAL: | Beryllium Copper |
| HEAT TREAT: | Please refer to Material & Finish Specifications in Engineering Resources |
| FINISH: | Nickel (All Dimensions Are Prior To Plating) |

Dimensions in Inches