

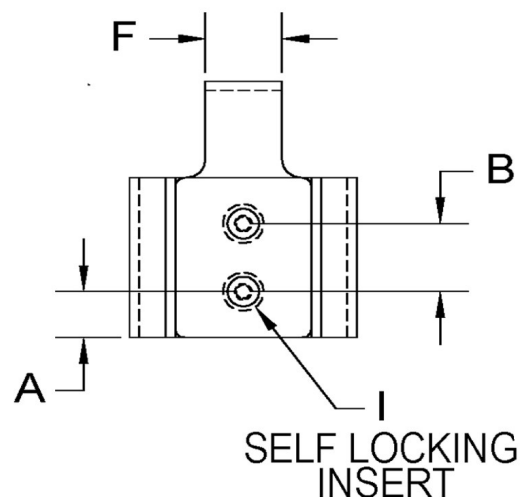


D+/- .015	L1+/- .01	L2+/- .01	T (Stk)+/- .002	H (Max)	W (Base Max)	X+/- .02	A+/- .005	B+/- .005	F+/- .01	G+/- .01	I Self Locking Insert
1.375	0.687	1.062	0.032	1.527	0.510	0.880	0.188	0.312	0.250	0.250	4-40

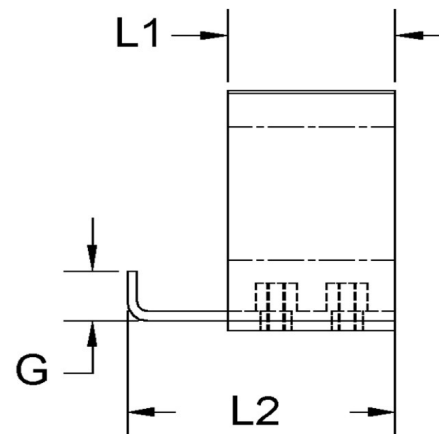

NOTE:

ALL DIMENSIONS ARE TO BE MEASURED WITH THE SPRING CLIP SECURED TO A FLAT SURFACE AND A COMPONENT OF THE NOMINAL DIAMETER IN PLACE.

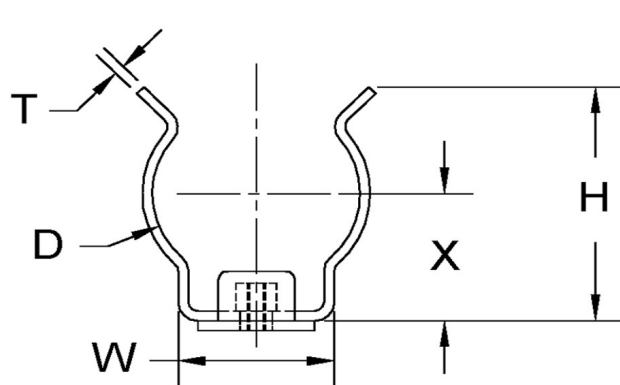

SEASTROM MANUFACTURING CO., INC.
456 SEASTROM STREET
TWIN FALLS, IDAHO 83301
(208) 737-4300 FAX (208) 734-7222

ALL INFORMATION
COPYRIGHTED BY
SEASTROM MFG.



PART NO.: 4545-137-106-2-T

PART NAME: Spring Clips 32

MATERIAL: Spring Steel

HEAT TREAT: Please refer to Material & Finish Specifications in Engineering Resources

FINISH: Bright Tin (All Dimensions Are Prior To Plating)

Dimensions in Inches