


Nominal Braid Width	Nominal Braid Thk	A	B	L	Nominal Circ Mils	Capacity Amps	D (Screw Size)	Insulated	Approx AWG Equiv
1	0.045	1	0.312	3	20800	85	10	NO	7

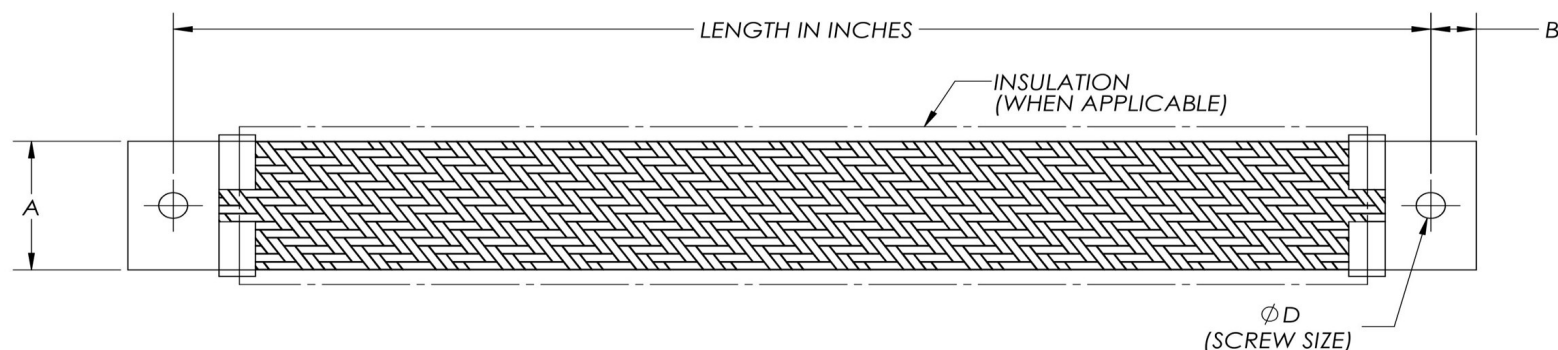

MATERIALS:

GROUND ENDS: COPPER (TIN SOLDER DIP)

BRAID: TINNED COPPER

INSULATION: HEAT SHRINKABLE TUBING
(WHEN APPLICABLE)

USE 5025-10X-X.XXX FOR INSULATED.

ASSEMBLY:

TERMINALS (GROUND ENDS) ARE CRIMPED
AND SOFT TIN SOLDERED TO BRAID



SEASTROM MANUFACTURING CO., INC.
456 SEASTROM STREET
TWIN FALLS, IDAHO 83301
(208) 737-4300 FAX (208) 734-7222

ALL INFORMATION
COPYRIGHTED BY
SEASTROM MFG.



PART NO.: 5025-5-3.000

PART NAME: Straps, Ground, Flexible

MATERIAL: Copper

HEAT TREAT: Please refer to Material & Finish Specifications in Engineering Resources

FINISH: None

Dimensions in Inches